FLIP200F

KICK RAILS AND WHEEL STOPS

Boplan reference: PL2020...

PRODUCT SPECIFICATIONS

APPLICATION	
Environment	**Ground level protection** - Wall protection (refrigerator walls, decorative walls, sandwich panels) - Wheel guide for pallet trucks or trolleys in busy traffic lanes - Protection of machines and infrastructure - Below a Boplan traffic barrier system - Indoor and outdoor use - Food Industry
MATERIAL	
Plinth	Extrilene® - UV resistant - Fire class E* - Non conductive - Impervious to most chemicals**
Endcap	Sustainable elastomer
STANDARD COLORS	
Plinth	Yellow - Black / Black - Yellow

*Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.
**Ask your local sales office for resistance to specific chemicals.

TÜV NORD
TÜV NORD Systems GmbH & Co. KG
Determination of the Product Type
Voluntary Certification acc. TÜV NORD Standard SSTH-ZE-RSP-W-3200
Testing Criteria to determine essential Product Properties:
PAS 13: 2017 sec. 7/7.8
For further information: www.tuev-nord.de

FIXATIONS				
			ZC (Zinc coated)	SS (Stainless steel)
STANDARD	Concrete screw		Ø17mm x 130mm	Not available
ALTERNATIVE	Wedge Anchor		Ø18 (M12) x 130mm	Not available

FEATURES AND FUNCTIONALITY - FLIP200F

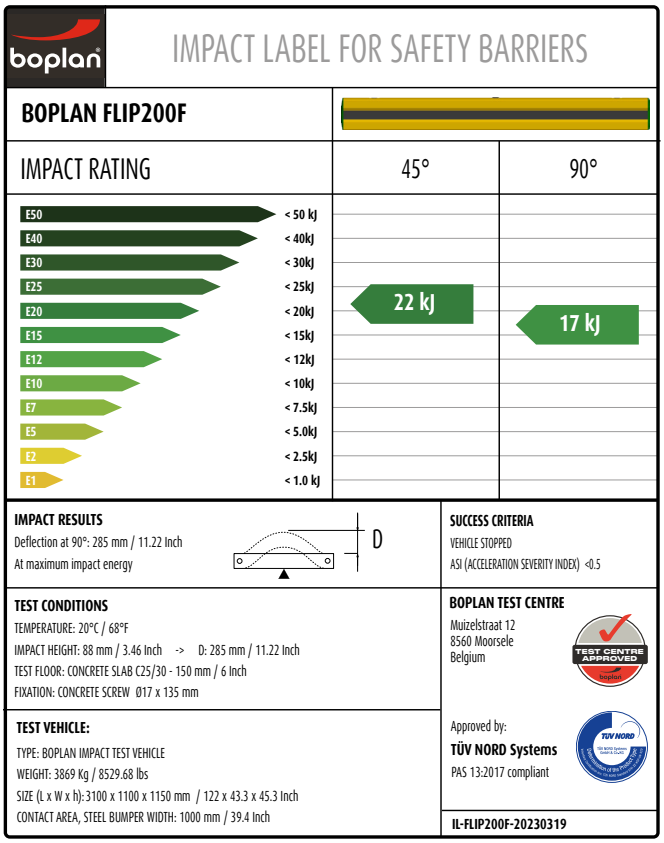

REQUIREMENTS	
Concrete quality	minimum C25/30
Concrete floor plate thickness	minimum 150 mm
Operational temperature	+5°C up to +40°
Water and humidity	**Zinc coated fixations:** indoor and outdoor use in most environments

SIZE	
Height	205 mm
Profile section	205 mm x 174 mm (10 thick)
Standard rail length	1000 mm - 2000 mm - 3000 mm (other sizes: 500 - 2999 mm)

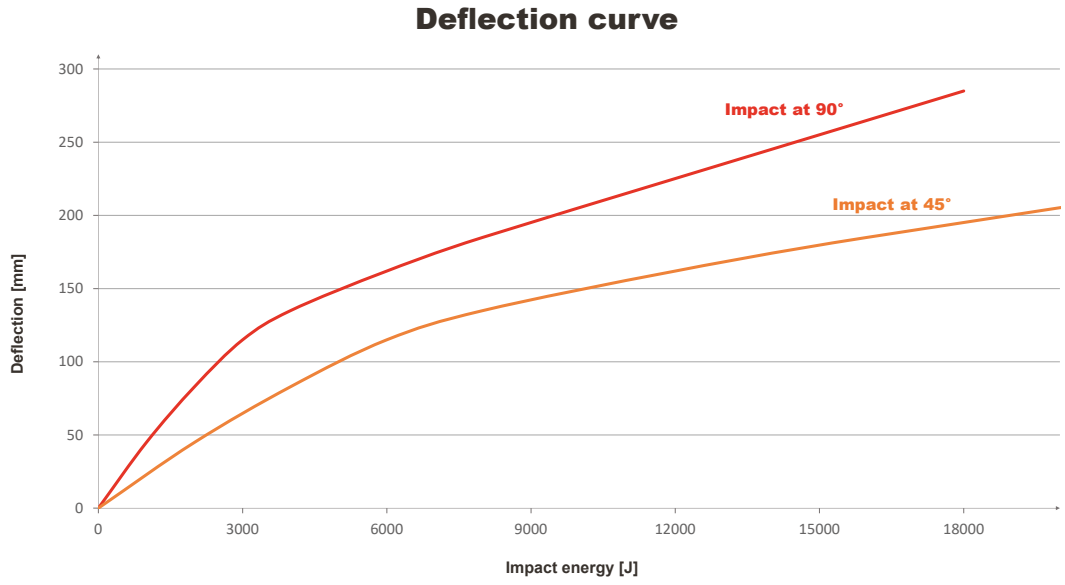

See impact label for detailed information on the test conditions.

REFERENCE LIST - FLIP200F

	YELLOW/Black	BLACK/Yellow
500mm (2fix)	PL2020-0500-0002YB	PL2020-0500-0002BY
1000mm (2fix)	PL2020-1000-0002YB	PL2020-1000-0002BY
2000mm (2fix)	PL2020-2000-0002YB	PL2020-2000-0002BY
3000mm (3fix)	PL2020-3000-0002YB	PL2020-3000-0002BY

	YELLOW/Black	BLACK/Yellow
550-749mm (2fix)	PL2021-0749-0002YB	PL2021-0749-0002BY
750-2200mm (2fix)	PL2021-2200-0002YB	PL2021-2200-0002BY
2201-2999mm (3fix)	PL2021-2999-0002YB	PL2021-2999-0002BY

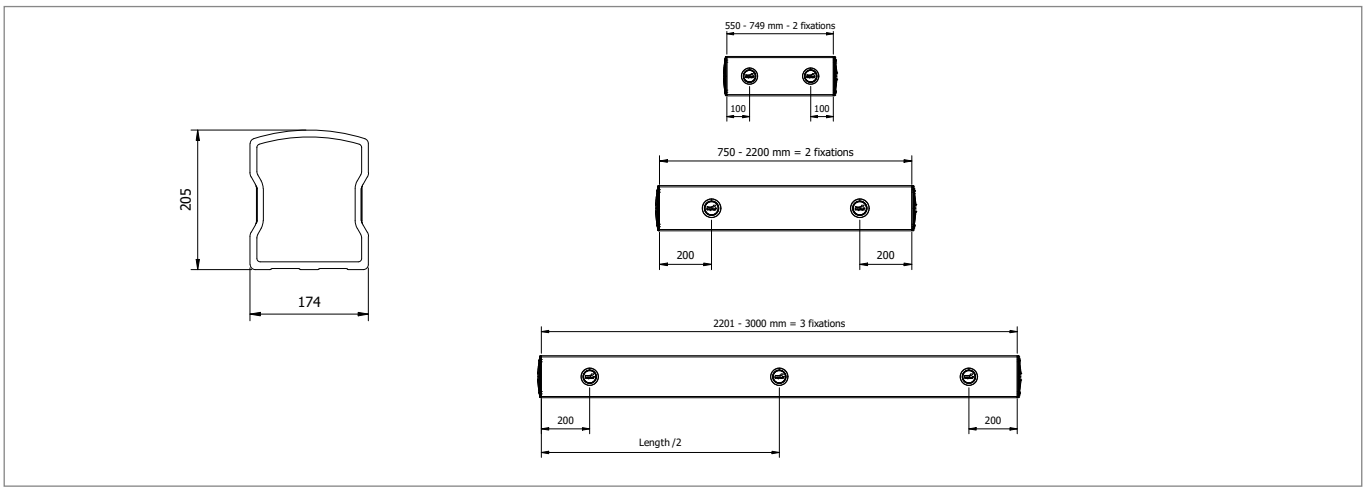

FEATURES AND FUNCTIONALITY - FLIP200F - TB BASE SPACER

APPLICATION	
Environment	The TB Base Spacers are specifically designed to fit underneath the end-and mid-posts of the TB400 series. By raising the baseplates, it creates additional space beneath the tube, allowing you to seamlessly integrate the FLIP200F, expanding the device's functionality.
Compatibility	TB400 - series

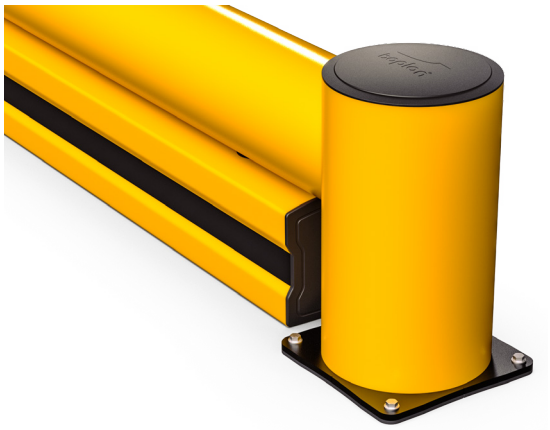
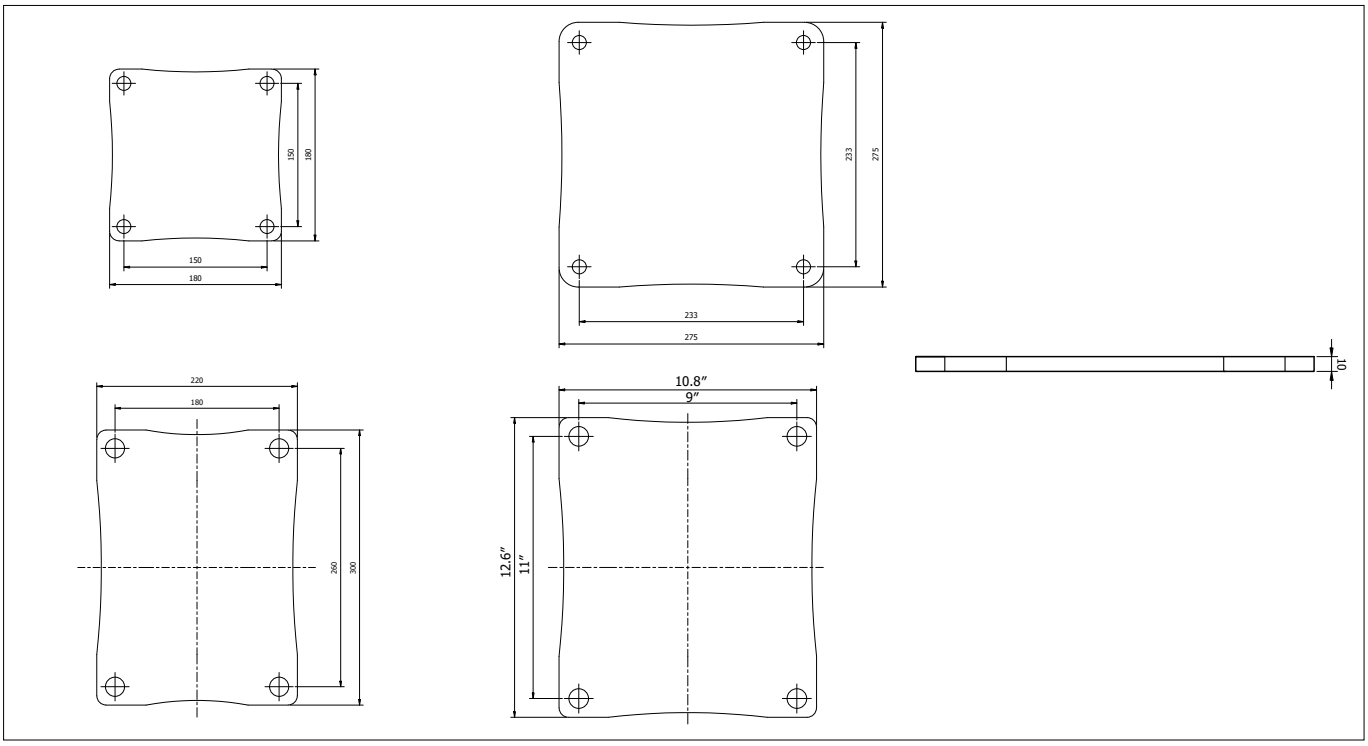
REFERENCE LIST	
PL0099-0180-0180BLPE	TB Base Spacer - TB400 MP - 180x180mm - Black - HDPE
PL0099-0275-0275BLPE	TB Base Spacer - TB400 EP - 275x275mm - Black - HDPE
PL0099-0300-0220BLPE	TB Base Spacer - TB400 MP - 300x220mm - Black - HDPE
PL0099-0320-0275BLPE	TB Base Spacer - TB400 EP - 320x275mm - Black - HDPE