

GuardSafe® Inground Steel Bollard




GuardSafe Inground Steel Bollards

are concreted into the ground to give maximum protection to your vulnerable property, plant and equipment.

Inground mounting makes the bollards very strong, however it also means they're more difficult to install and remove/replace if required, compared to surface mounted bollards.

Features

- Compliant with AS/NZS 1170.1 Section 3.8
- Knock-on caps can be removed to allow concrete filling if required.

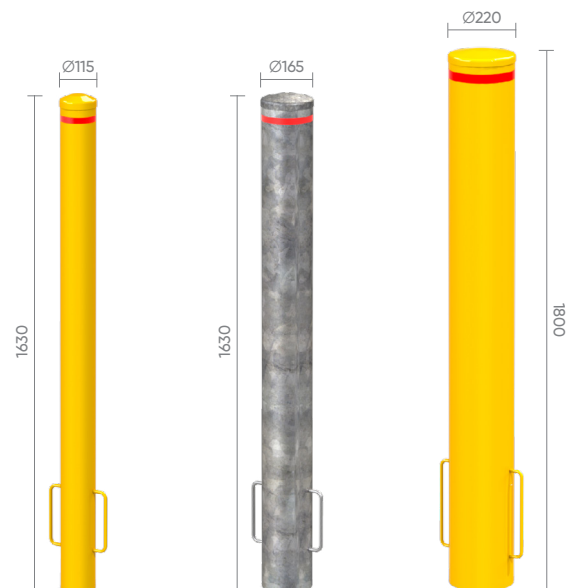

Code	Description	Finish	Size (mm)	Height above ground (mm)
1611-113	Inground Bollard	Galv with Yellow Powdercoat	Ø115 x 1630(H)	1100
1611-112	Inground Bollard	Galvanised Steel	Ø115 x 1630(H)	1100
1611-115	Inground Bollard	Galv with Yellow Powdercoat	Ø165 x 1630(H)	1100
1611-114	Inground Bollard	Galvanised Steel	Ø165 x 1630(H)	1100
1611-117	Inground Bollard	Galv with Yellow Powdercoat	Ø220 x 1800(H)	1200
1611-116	Inground Bollard	Galvanised Steel	Ø220 x 1800(H)	1200

VIEW ONLINE

