VANGUARD™
Standing between you and harm

TECHNICAL SPECIFICATIONS Carpark Barriers

RhinoStop® Double Guardrail

ASSET & WALKWAY PROTECTION

- **Height:** 1020mm
- **Configuration:** Can be configured with a handrail and anti-climb mesh
- **Construction:** Galvanised steel
- **Posts:** Crumple Zone Technology
- **Mounting:** Surface mounted to concrete
- **Maximum Post Spacing**: 2m
- **Base Plate:** 32mm thick
- **Fixings:** M20 x 187mm Fischer anchor studs (2 per post)

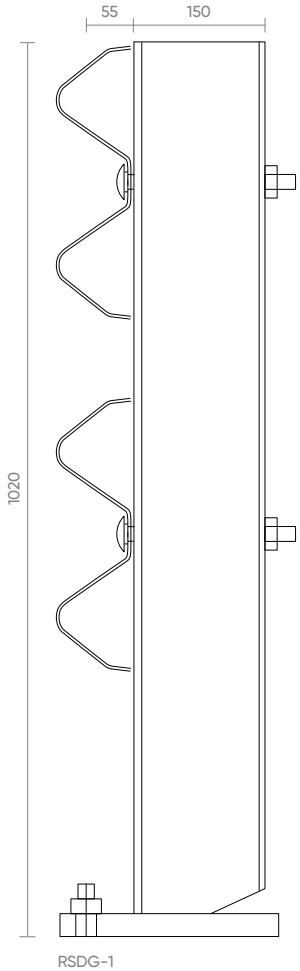

RSDG-1

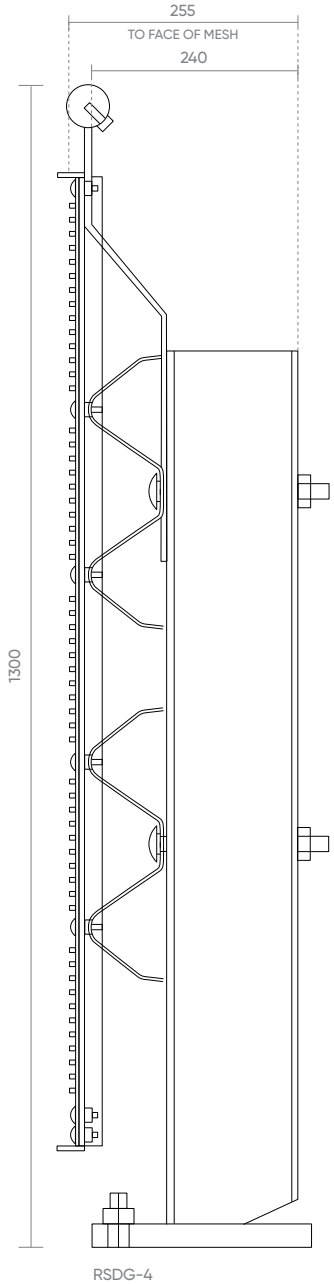

RSDG-4

TESTING & CERTIFICATION

- Meets AS/NZS 1170.1 – Type F 30kN and Type G 40kN
- Full-scale crash tested
- Containment of a 2500kg small truck, impacting 1m above floor level, traveling at 20km/h



Base plate

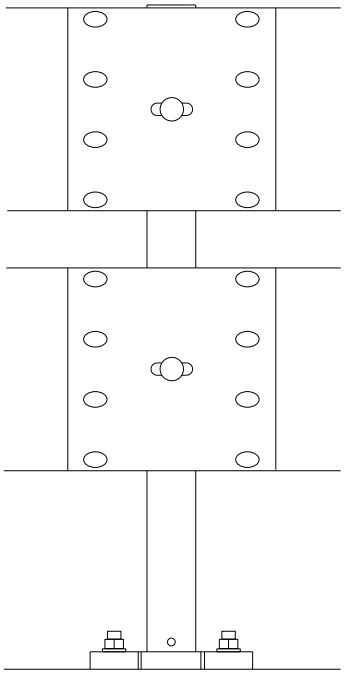
Front elevation

Options

Code	Description	Height (mm)	Rail Length (mm)	Finish
RSDG-1	Double Guardrail – Type 1	1020	Custom	Galvanised
RSDG-2	Double Guardrail with Handrail – Type 2	1300	Custom	Galvanised
RSDG-4	Double Guardrail with Handrail and Anti-Climb Mesh – Type 4	1300	Custom	Galvanised

End Caps

Options	
Stumpy Bullnose	Galvanised
	Galv/Yellow
Plastic Sleeve	Yellow

VIEW ONLINE

NZ vanguardgroup.co.nz • 0800 500 147 • hello@vanguardgroup.co.nz

AU vanguardaustralia.com.au • 1800 999 243 • hello@vgl.net.au

Updated January 2026